

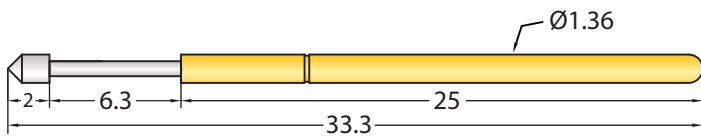


# P100 - Series


DIMENSIONS - mm

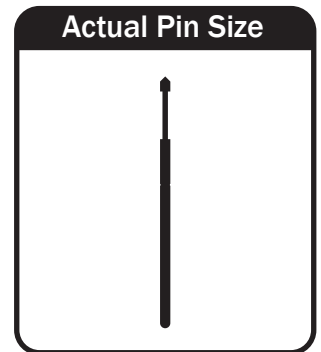

<p><b>90° Concave Head</b></p> <p>TP-P100-A - L/H</p>	<p><b>30° Spear Point</b></p> <p>TP-P100-B - L/H</p>	<p><b>90° Convex Head</b></p> <p>TP-P100-E - L/H</p>	<p><b>Serrated Head</b></p> <p>TP-P100-H - L/H</p>
<p><b>Crown Head</b></p> <p>TP-P100-V - L/H</p>	<p><b>Plain Radius</b></p> <p>TP-P100-J-H</p>		

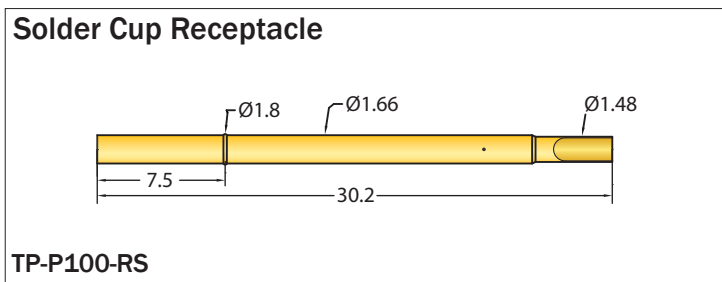

Technical Data		
Recommended Min. Center	2.54mm	
Full Travel	6.30mm	
Spring Pressure (± 20%)	Light (L)	150 grams
	Heavy (H)	250 grams
Current Rating	3A	
Contact Resistance	50 milliohms	

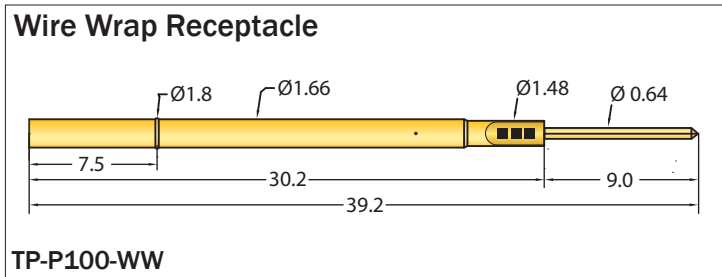

Materials	
Plunger	Heat-treated Beryllium Copper Rhodium plated over hard Nickel.
Barrel	Phosphor Bronze. Gold Plated
Spring	Music Wire. Gold Plated
Receptacle	Brass or Phosphor Bronze tube. Gold Plated