

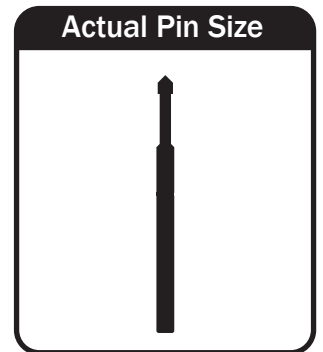


P156 - Series

DIMENSIONS - mm

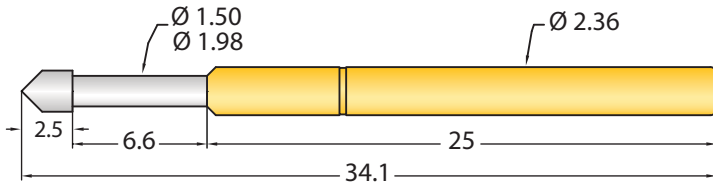

<p>90° Concave Head</p> <p>TP-P156-A - L/H</p>	<p>30° Spear Point</p> <p>TP-P156-B - L/H</p>	<p>90° Convex Head</p> <p>TP-P156-E - L/H</p>	<p>Serrated Head</p> <p>TP-P156-H - L/H</p>
<p>Radius Convex Head</p> <p>TP-P156-D-H</p>			

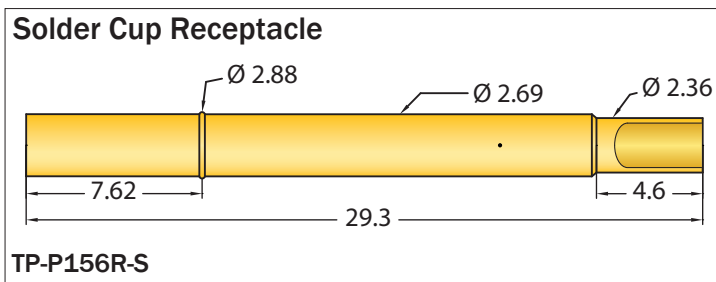

Technical Data		
Recommended Min. Center	3.97mm	
Full Travel	6.6mm	
Spring Pressure (± 20%)	Light (L)	150 grams
	Heavy (H)	250 grams
Current Rating	5A	
Contact Resistance	50 milliohms	

Materials	
Plunger	Heat-treated Beryllium Copper Rhodium plated over hard nickel.
Barrel	Brass. Gold Plated
Spring	Stainless Steel
Receptacle	Brass. Gold Plated