

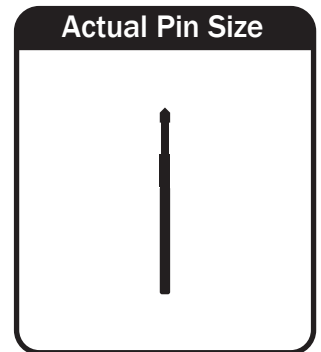
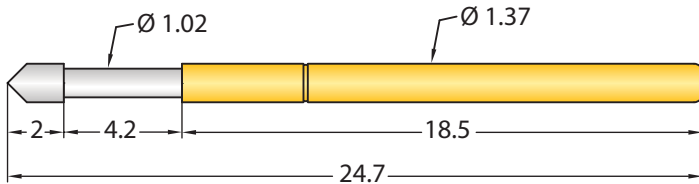








P160 - Series

DIMENSIONS - mm

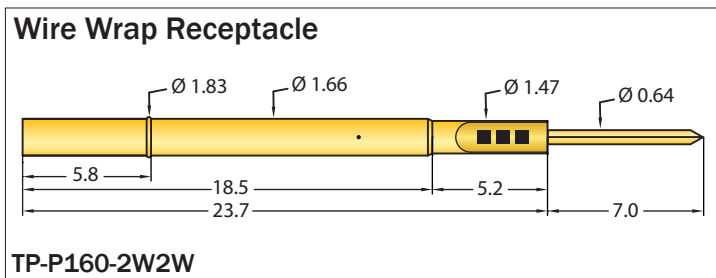

<p>90° Concave Head</p>  <p>TP-P160-A3 - L/H</p>	<p>30° Spear Point</p>  <p>TP-P160-B - L/H</p>	<p>90° Convex Head</p>  <p>TP-P160-E4 - L/H</p>	<p>Serrated Head</p>  <p>TP-P160-H - L/H</p>
<p>Plain Radius</p>  <p>TP-P160-J - L/H</p>	<p>Crown Head</p>  <p>TP-P160-V - L/H</p>		

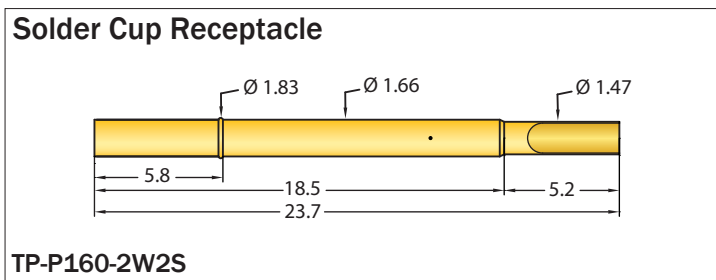

Technical Data		
Recommended Min. Center	2.54mm	
Full Travel	4.2mm	
Spring Pressure (± 20%)	Light (L)	110 grams
	Heavy (H)	150 grams
Current Rating	3A	
Contact Resistance	50 milliohms	

Materials	
Plunger	Heat-treated Beryllium Copper Rhodium plated over hard nickel.
Barrel	Phosphor Bronze. Gold Plated
Spring	Music Wire. Gold Plated
Receptacle	Brass or Phosphor Bronze tube. Gold Plated