

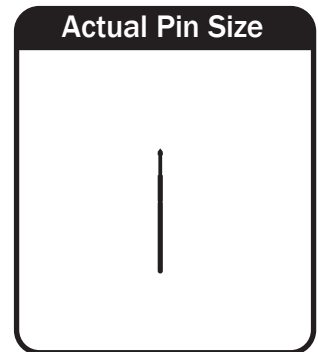
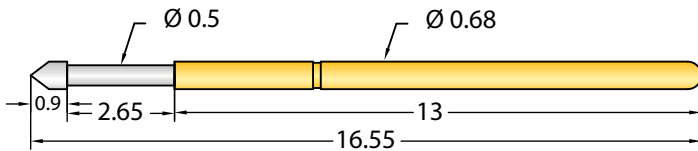


P50 - Series

DIMENSIONS - mm

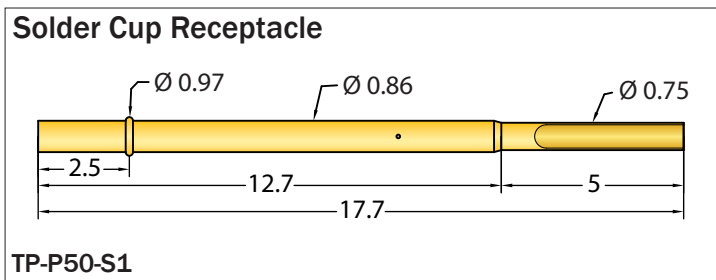

<p>90° Concave Head</p> <p>TP-P50-A - L/H</p>	<p>45° Spear Point</p> <p>TP-P50-B - L/H</p>	<p>90° Convex Head</p> <p>TP-P50-E - L/H</p>	<p>Serrated Head</p> <p>TP-P50-H - L/H</p>
<p>Plain Radius</p> <p>TP-P50-J - L/H</p>	<p>90° Convex Machined</p> <p>TP-P50-LM - L/H</p>	<p>Plain Crown</p> <p>TP-P50-U - L/H</p>	<p>Crown Head</p> <p>TP-P50-V - L/H</p>

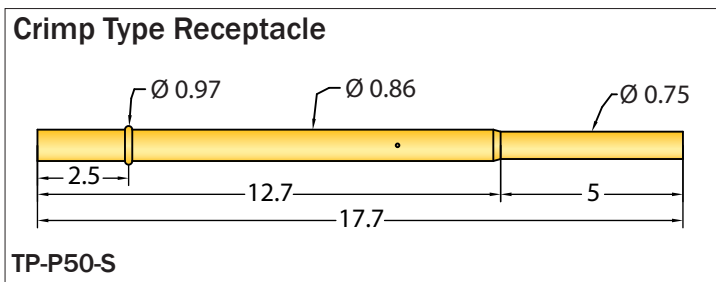

Technical Data		
Recommended Min. Center	1.27mm	
Full Travel	2.65mm	
Spring Pressure (± 20%)	Light (L)	80 grams
	Heavy (H)	120 grams
Current Rating	3A	
Contact Resistance	50 milliohms	

Materials	
Plunger	Heat-treated Beryllium Copper Rhodium plated over hard nickel
Barrel	Phosphor Bronze. Gold Plated
Spring	Music Wire. Gold Plated
Receptacle	Phosphor Bronze. Gold Plated